(19) World Intellectual Property **Organization**

International Bureau





(43) International Publication Date 12 May 2005 (12.05.2005)

PCT

(10) International Publication Number WO 2005/041775 A1

(51) International Patent Classification⁷: G01T 1/166

A61B 6/00,

(21) International Application Number:

PCT/IB2004/052111

- (22) International Filing Date: 15 October 2004 (15.10.2004)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

03104003.3

29 October 2003 (29.10.2003)


EP

- (71) Applicant (for DE only): PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH [DE/DE]; Steindamm 94, 20099 Hamburg (DE).
- (71) Applicant (for all designated States except DE, US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MOLLUS, Sabine [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). WEESE, Jürgen [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).
- (74) Agent: VOLMER, Georg; Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: DEVICE AND METHOD FOR ADJUSTING IMAGING PARAMETERS OF AN X-RAY APPARATUS

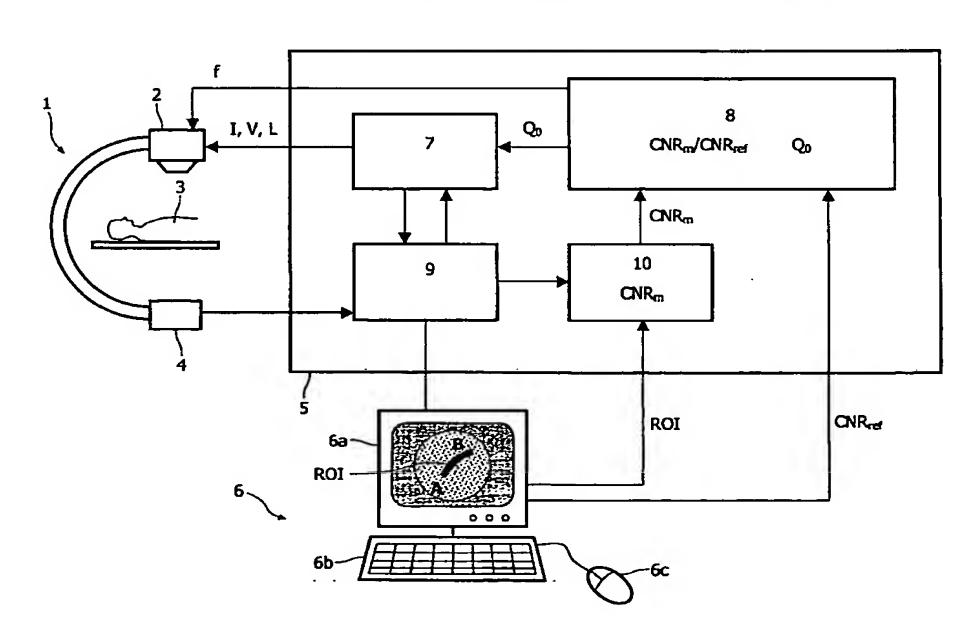

(57) Abstract: The invention relates to a device for adjusting imaging parameters of an X-ray apparatus (1), whereby a user predefines on a preliminary image an image region of interest (ROI) and a value of the contrast-to-noise ratio (CNR_{ref}) desired for this image region. Based on the current contrast-to-noise ratio (CNR_m), new imaging parameters (I, V, L, f, Q₀) are then calculated for a generator-control module (7) to control the X-ray apparatus (1) during an image. By means of the method, the X-ray dose may be reduced to a minimum, while at the same time the desired visibility of a region of interest is ensured.

A1 005/041775

WO 2005/041775 A1



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report